



IC-F52D-UL IC-F62D-UL

VHF AND UHF DIGITAL TRANSCEIVERS

UL Approved Intrinsicly Safe Digital Radio with 5 W Output Power and Compact Design



IC-F52D-UL

IC-F62D-UL

The IC-F52D-UL/F62D-UL is a UL approved intrinsically safe radio. A full 5 W of output power is available with this approval. Other safety features such as Man Down, Lone Worker and Emergency Call functions help your team remain connected in hazardous locations.

■ Small, light and feature packed

■ Multiple operating modes*¹

- Analog FM
- NXDN™/dPMR™ conventional
- Upgradable to NXDN™ Type-D trunking
- Upgradable to dPMR™ Mode 3 trunking*²

*¹ NXDN/dPMR modes are not compatible with each other. The radio protocol/mode cannot be changed after purchase. *² Not available in all regions.

■ Full dot-matrix display, rotary channel and volume knob for simple every-day operation

■ Built-in Bluetooth® capability, Voice Recording, Active Noise Cancelling functions

■ Motion/Stationary Detection, Man Down and Lone Worker functions

■ OTAP (Over-the-Air Programming) function easily reconfigures in-the-field radios

■ Intelligent battery management helps extend the battery life



General Features

- 136–174, 350–400, 400–470, 450–512, 450–520 MHz versions
- 512 channels / 128 zones
- 14 character dot-matrix display with status icons
- Improved user interface
- Programmable functions and menu items in a language other than English (For example French, Spanish, German, Russian and Turkish)
- Backlit LCD and buttons
- Continuous rotary knob and ON/OFF volume knob
- 800 mW loud and intelligible internal speaker audio
- MIL-STD-810 G shock, vibration, temperature and more
- IP67/66/55/54 waterproof & dust-tight protection
- 34.1 mm (1.3 inch) slim dimensions (with BP-292UL battery pack)
- Battery information display
- License key upgrade (trunking)

Operating Mode

- NXDN or dPMR mode 1/mode 2 conventional
- NXDN or dPMR multi-site conventional over IP network
- NXDN Type-D single/multi-site trunking*
* License key (ISL-UGMTR) required.
- dPMR Mode 3 trunking*
* License key (ISL-UGMD3) required. Not available in all regions.
- 12.5 kHz digital mode (NXDN conventional)
- Analog mode
- Analog/digital mixed operation

Digital Functions (Voice and Data)

- AMBE+2™ vocoder
- Over-the-Air Programming (OTAP) function*
* Optional OTAP manager (CS-OTPM1) required.
- Over-the-Air Alias (OAA) sends own name with a call
- Over-the-Air Update (OTAU) changes the repeater channel data and site code over the air (NXDN Type-D trunking)
- Individual, group and all call
- Late entry for group call
- Status call and polling
- Short data messages
- Call alert (NXDN)
- Transparent data mode (dPMR)



Check our web site to know more about
6.25 kHz FDMA narrow band.
www.icomjapan.com/explore/digital



Analog Functions

- CTCSS and DTCS tone
- 2-Tone and 5-Tone
- MDC functions (depending on version)
- BIIS 1200 (MSK) (depending on version)
- LTR™ trunking (depending on version)
- DTMF autodial

Security and Safety

- Digital voice scrambler (Low level encryption)
- Analog voice scrambler (Inversion)
- Power ON password
- Tactical group temporarily reconfigures user talkgroups
- Radio stun/revive/kill
- Remote monitor (NXDN)/ambience listening (dPMR)
- Emergency key for emergency call
- Man Down function
- Lone Worker function
- Motion/stationary detection

Scan Functions

- Priority scan
- Voting scan for site roaming

Voice/Audio Functions

- Voice announcement (Channel number and zone)
- Voice recording/playback (Up to 8 minutes)
- TX/RX active noise canceller
- TX/RX audio equalizer
- Audio compander (Analog mode)

Hardware Features

- Programmable vibration alert
- Wireless radio programming over Bluetooth®

SPECIFICATIONS

IC-F52D-UL • IC-F62D-UL

		IC-F52D-UL NXDN Version	IC-F52D-UL dPMR Version	IC-F62D-UL NXDN Version	IC-F62D-UL dPMR Version
GENERAL					
Frequency coverage (Depending on the version)		136–174 MHz	136–174 MHz	350–400, 400–470, 450–512, 450–520 MHz	400–470 MHz
Number of channels		512 channels /128 zones			
Type of emission (Depending on the version)	Analog	16K0F3E*1, 11K0F3E, 8K50F3E	16K0F3E*1, 8K50F3E	16K0F3E*1, 11K0F3E, 8K50F3E,	16K0F3E*1, 8K50F3E
	Digital Narrow (DN)	8K30F1E/D	–	8K30F1E/D	–
	Digital Very Narrow (DVN)	4K00F1E/D	4K00F1E/D	4K00F1E/D	4K00F1E/D
Power supply requirement		7.5 V DC nominal			
Current drain (approx.)	Tx	1.8 A			
	Rx	500 mA /170 mA (Max. audio (internal SP)/Standby) 600 mA /170 mA (Max. audio (internal SP)/Standby)			
Antenna impedance		50 Ω			
Operating temperature range		–30 °C to +60 °C; –22 °F to +140 °F (Radio specifications)			
Dimensions (W × H × D; Projections not included)		56 × 92 × 34.1mm; 2.2 × 3.6 × 1.3 in (with BP-292UL)			
Weight (approx.)			125 g; 4.4 oz (main unit)		
			270 g; 9.5 oz (with BP-292UL and MBB-3)		
TRANSMITTER					
Output power (Hi, L2, L1)		5 W, 2 W, 1 W			
Frequency stability		±1.0 ppm			
Spurious emissions		80 dB typical			
FM Hum and noise		57 dB typical (@25 kHz), 55 dB typical (@12.5 kHz)		57 dB typical (@25 kHz), 56 dB typical (@12.5 kHz)	
Audio harmonic distortion		0.4% typical (AF 1 kHz 40% deviation)			
FSK error		1% typical (@DVN/DN*)			
RECEIVER					
Sensitivity	Digital (1% BER)	–5.0 dBμV emf typical (0.28 μV typical) (@DVN), –3.0 dBμV emf typical (0.35 μV typical) (@DN*)		–4.0 dBμV emf typical (0.32 μV typical) (@DVN), –3.0 dBμV emf typical (0.35 μV typical) (@DN*)	
	Analog (12 dB SINAD)	0.23 μV typical		0.23 μV typical	
Adjacent channel selectivity	Digital	70 dB typical (@DVN), 72 dB typical (@DN*)		66 dB typical (@DVN), 68 dB typical (@DN*)	
	Analog	79 dB typical (@25 kHz), 77 dB typical (@12.5 kHz)		76 dB typical (@25 kHz), 73 dB typical (@12.5 kHz)	
Spurious response rejection		76 dB typical		78 dB typical	
Intermodulation rejection	Digital	73 dBμV emf typical (@DVN); –40 dBm typical (@DN*)		73 dBμV emf typical (@DVN), –40 dBm typical (@DN*)	
	Analog	76 dB typical		74 dB typical	
Audio output power	Internal SP	800 mW typical (at 5% distortion, 12 Ω load)			
	External SP	1000 mW typical (at 5% distortion, 8 Ω load)			

Measurements made in accordance with TIA-603, EN300 086, EN301 166, EN300 113. All stated specifications are subject to change without notice or obligation.
 *1 25 kHz bandwidth is no longer available for FCC Part 90 licensees for USA versions. ** DVN: Digital Very Narrow (6.25 kHz), DN: Digital Narrow (12.5 kHz). DN is for NXDN version only.
 NXDN/dPMR modes are not compatible with each other. The radio protocol/mode cannot be changed after purchase.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	II
Salt Fog	509.5	–
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.6	I
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

Ingress Protection Standard	
Dust & Water	IP67/66/55/54



Approved UL Classifications

Intrinsically safe:

- Class I, Division 1, Groups C, D;
- Class II, Division 1, Groups E, F, G;
- Class III, T3C.

Non-incendive:

- Class I, Division 2, Groups A, B, C, D.

Ambient temperature:

–20°C (–4°F) to +60°C (+140°F)

Standards of safety:

- ANSI/TIA-4950-A
- ANSI/UL 121201

* Intrinsically Safe when used with Icom BP-292UL battery pack.

Battery Life

Battery pack	Type	Capacity	Operating time*
BP-292UL	Li-ion 7.2 V	2010 mAh (typ.), 1910 mAh (min.)	10 hours (Approx.)

* Tx: Rx: standby = 5:5:90 (3 sec. : 3 sec.: 54 sec.) duty cycle. Power save function ON.

Supplied accessories: (May differ depending on the transceiver version)
 • Battery pack, BP-292UL • Belt clip, MBB-3

OPTIONAL ACCESSORIES

IC-F52D-UL • IC-F62D-UL

■ BATTERY PACK


BP-292UL: Rechargeable Li-ion 7.2 V/1910 mAh (min.), 2010 mAh (typ.). IP67 protection.

■ BATTERY CHARGERS

BC-226: Multi-connectable rapid charger (connects up to six BC-226 units). Charges the BP-292UL in 2.7 hours (approx.).

+ **BC-228:** AC adapter. One AC adapter is required for up to six charger units.

BC-227: Compact desktop charger. Charges the BP-292UL in 2.7 hours (approx.). AC adapter BC-123S supplied with the BC-227.

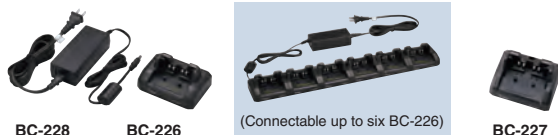

BC-228

BC-226

(Connectable up to six BC-226)

BC-227

■ POWER SUPPLY CABLES

CP-23L: Vehicle charger cable for use with the BC-227.

OPC-515L: DC power cable for use with the BC-227.

■ SPEAKER-MICROPHONE

HM-184UL: Speaker-microphone. IP67 protection.



HM-184UL

■ BELT CLIPS, BELT HANGERS AND CARRYING CASES

MBB-3: Alligator belt clip. Same as supplied.

MB-136: Swivel belt clip.

MB-96N: Swivel type leather belt hanger.

MB-96F: Fixed type leather belt hanger. For use with the MBB-3.

MB-96FL: Long fixed type leather belt hanger. For use with the MBB-3.

LC-191: Hard type carrying case. Charging is possible while the case is attached.



MBB-3

MB-136

MB-96N

MB-96F

MB-96FL

LC-191

■ CABLE

OPC-1870: Zone copy cable. Handheld to handheld type.

■ SOFTWARE AND ACTIVATION KEYS

CS-OTPM1: OTAP manager software.

ISL-UGMTR: NXDN™ Type-D trunking upgrade key.

ISL-UGMD3: dPMR™ Mode 3 trunking upgrade key. (Not available in all regions.)

ISL-AK25K: 25 kHz activation key.

■ ANTENNAS

FA-SC25V: 136–150 MHz

FA-SC28V: 148–162 MHz

FA-SC29V: 160–174 MHz

FA-SC01U: 350–400 MHz

FA-SC25U: 400–430 MHz

FA-SC57U: 430–470 MHz

FA-SC72U: 470–520 MHz

■ STUBBY ANTENNAS

FA-SC26VS: 136–144 MHz

FA-SC27VS: 142–150 MHz

FA-SC56VS: 150–162 MHz

FA-SC57VS: 160–174 MHz

FA-SC26US: 400–450 MHz

FA-SC73US: 450–490 MHz

■ HIGH GAIN ANTENNAS

FA-SC62V: 150–160 MHz

FA-SC63V: 155–165 MHz

■ CUT-TYPE ANTENNAS

FA-SC61VC: 136–174 MHz

FA-SC61UC: 380–520 MHz

Some options may not be available in some countries. Please ask your dealer for details.

DO NOT use the transceiver with any other equipment other than the above accessories.
The battery charger, BC-226 or BC-227 must not be used in an explosive atmosphere.

Read all instructions enclosed with the transceiver carefully and completely before using the transceiver.

Icom, Icom Inc. and Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. NXDN is a trademark of Icom Incorporated and JVC KENWOOD Corporation. dPMR and the dPMR logo are trademarks of the dPMR MoU Association. IDAS logo is a trademark of Icom Incorporated. AMBE+2 is a trademark and property of Digital Voice System, Inc. LTR is a trademark of the E.F. Johnson Technologies, INC. Windows is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Icom Inc. is under license. All other trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icomjapan.com

Count on us!

Icom America Inc.
www.icomamerica.com

Icom (Europe) GmbH
www.icomeurope.com

Icom (Australia) Pty. Ltd.
www.icom.net.au

Your local distributor/dealer:

Icom Canada
www.icomcanada.com

Icom Spain S.L.
www.icomspain.com

Icom Asia Co., Ltd.
www.icomasia.com

Icom Brazil
E-mail: sales@icombrasil.com

Icom (UK) Ltd.
www.icomuk.co.uk

Shanghai Icom Ltd.
www.bjicom.com

Icom France s.a.s.
www.icom-france.com